
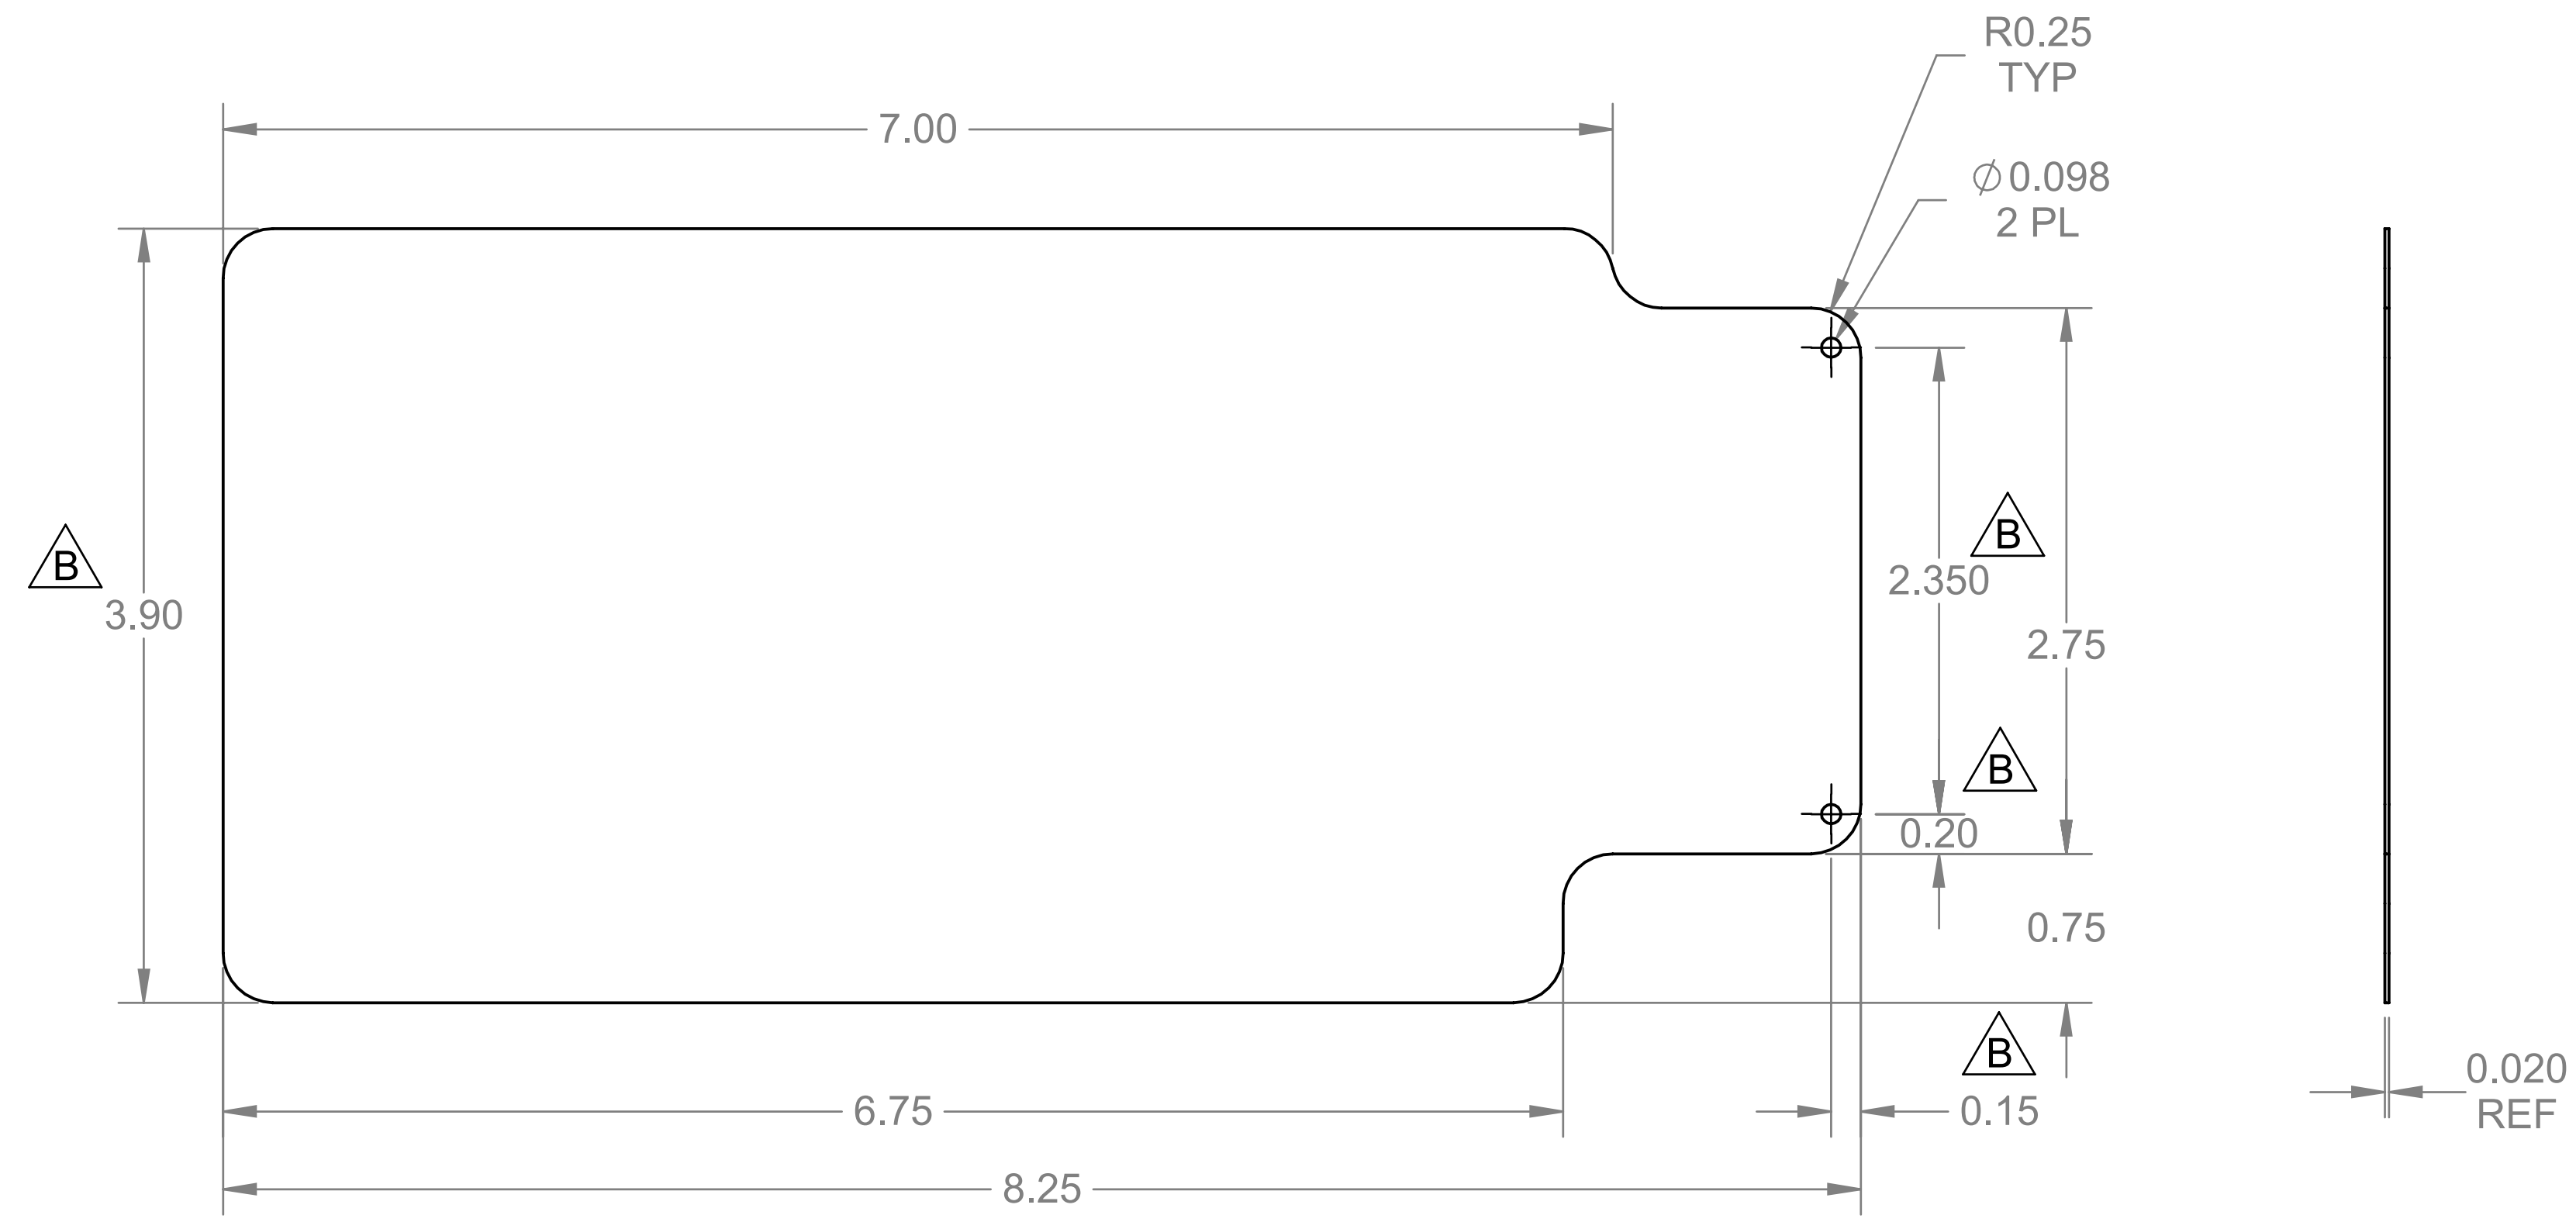


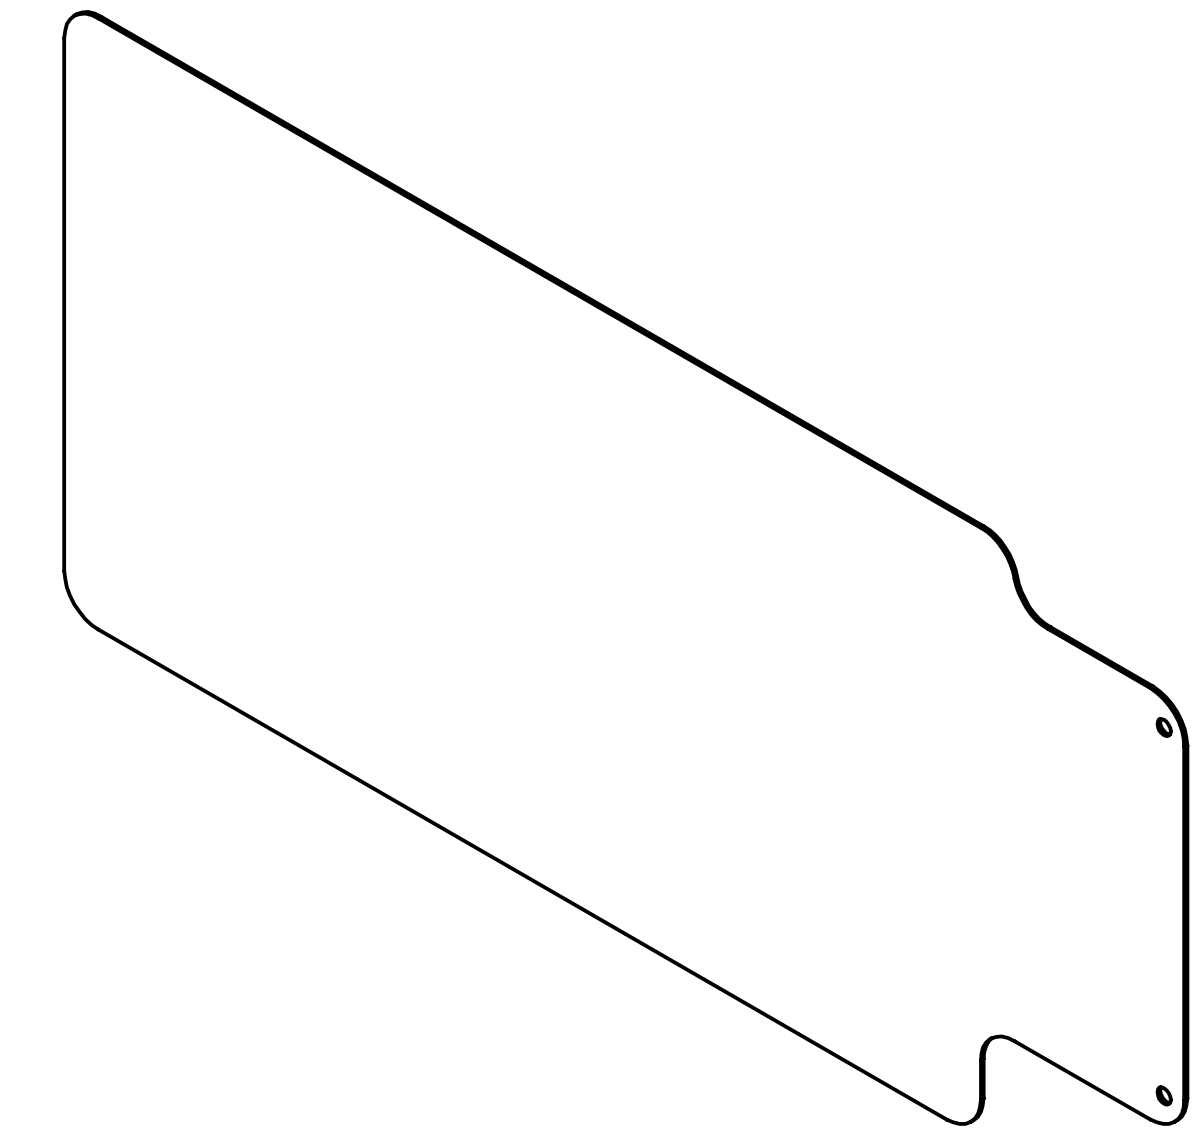


D5358-1 COVER PLATE B

NOTES:
1) MATERIAL: 6061-T6/T62 ALUMINUM SHEET 0.020 THICK
PER QQ-A-250/11 OR AMS-QQ-A-250/11
OR AMS 4025 OR AMS 4027 OR ASTM B209
OR 2024-T3 ALUMINUM SHEET, 0.020 THICK
PER QQ-A-250/4 OR AMS-QQ-A-250/4
OR AMS4037 OR ASTM B209
REF DART SPEC M6061TS.020 OR M2024T3S.020
2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
PRIME "GREY EPOXY TEMPO 4500PB-40B PRIMER" PER DART QSI 005 4.2
3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
4) UNITS: INCHES UNLESS OTHERWISE NOTED
5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
6) IDENTIFICATION: IDENTIFY PER DART QSI 044 6.1
7) WEIGHT: 0.06 lbs

PRELIMINARY ISSUE

REV.	DESCRIPTION	BY	DATE
B	REVISE -1 DIMENSIONS & RELOCATED ∅0.098 HOLES (ZN C3-1)	RF	17.02.09
A	NEW ISSUE	RF	15.08.10

DESIGN	RF	**DART AEROSPACE LTD** HAWKESBURY, ONTARIO, CANADA
DRAWN	RF	
CHECKED	VS	DRAWING NO. D5358 — REV. B2 — SHEET 1 OF 2
MFG. APPR.	DD	
APPROVED	HS	TITLE COVER PLATE — SCALE NTS
DE APPR.	DS	
DATE	17.02.09	

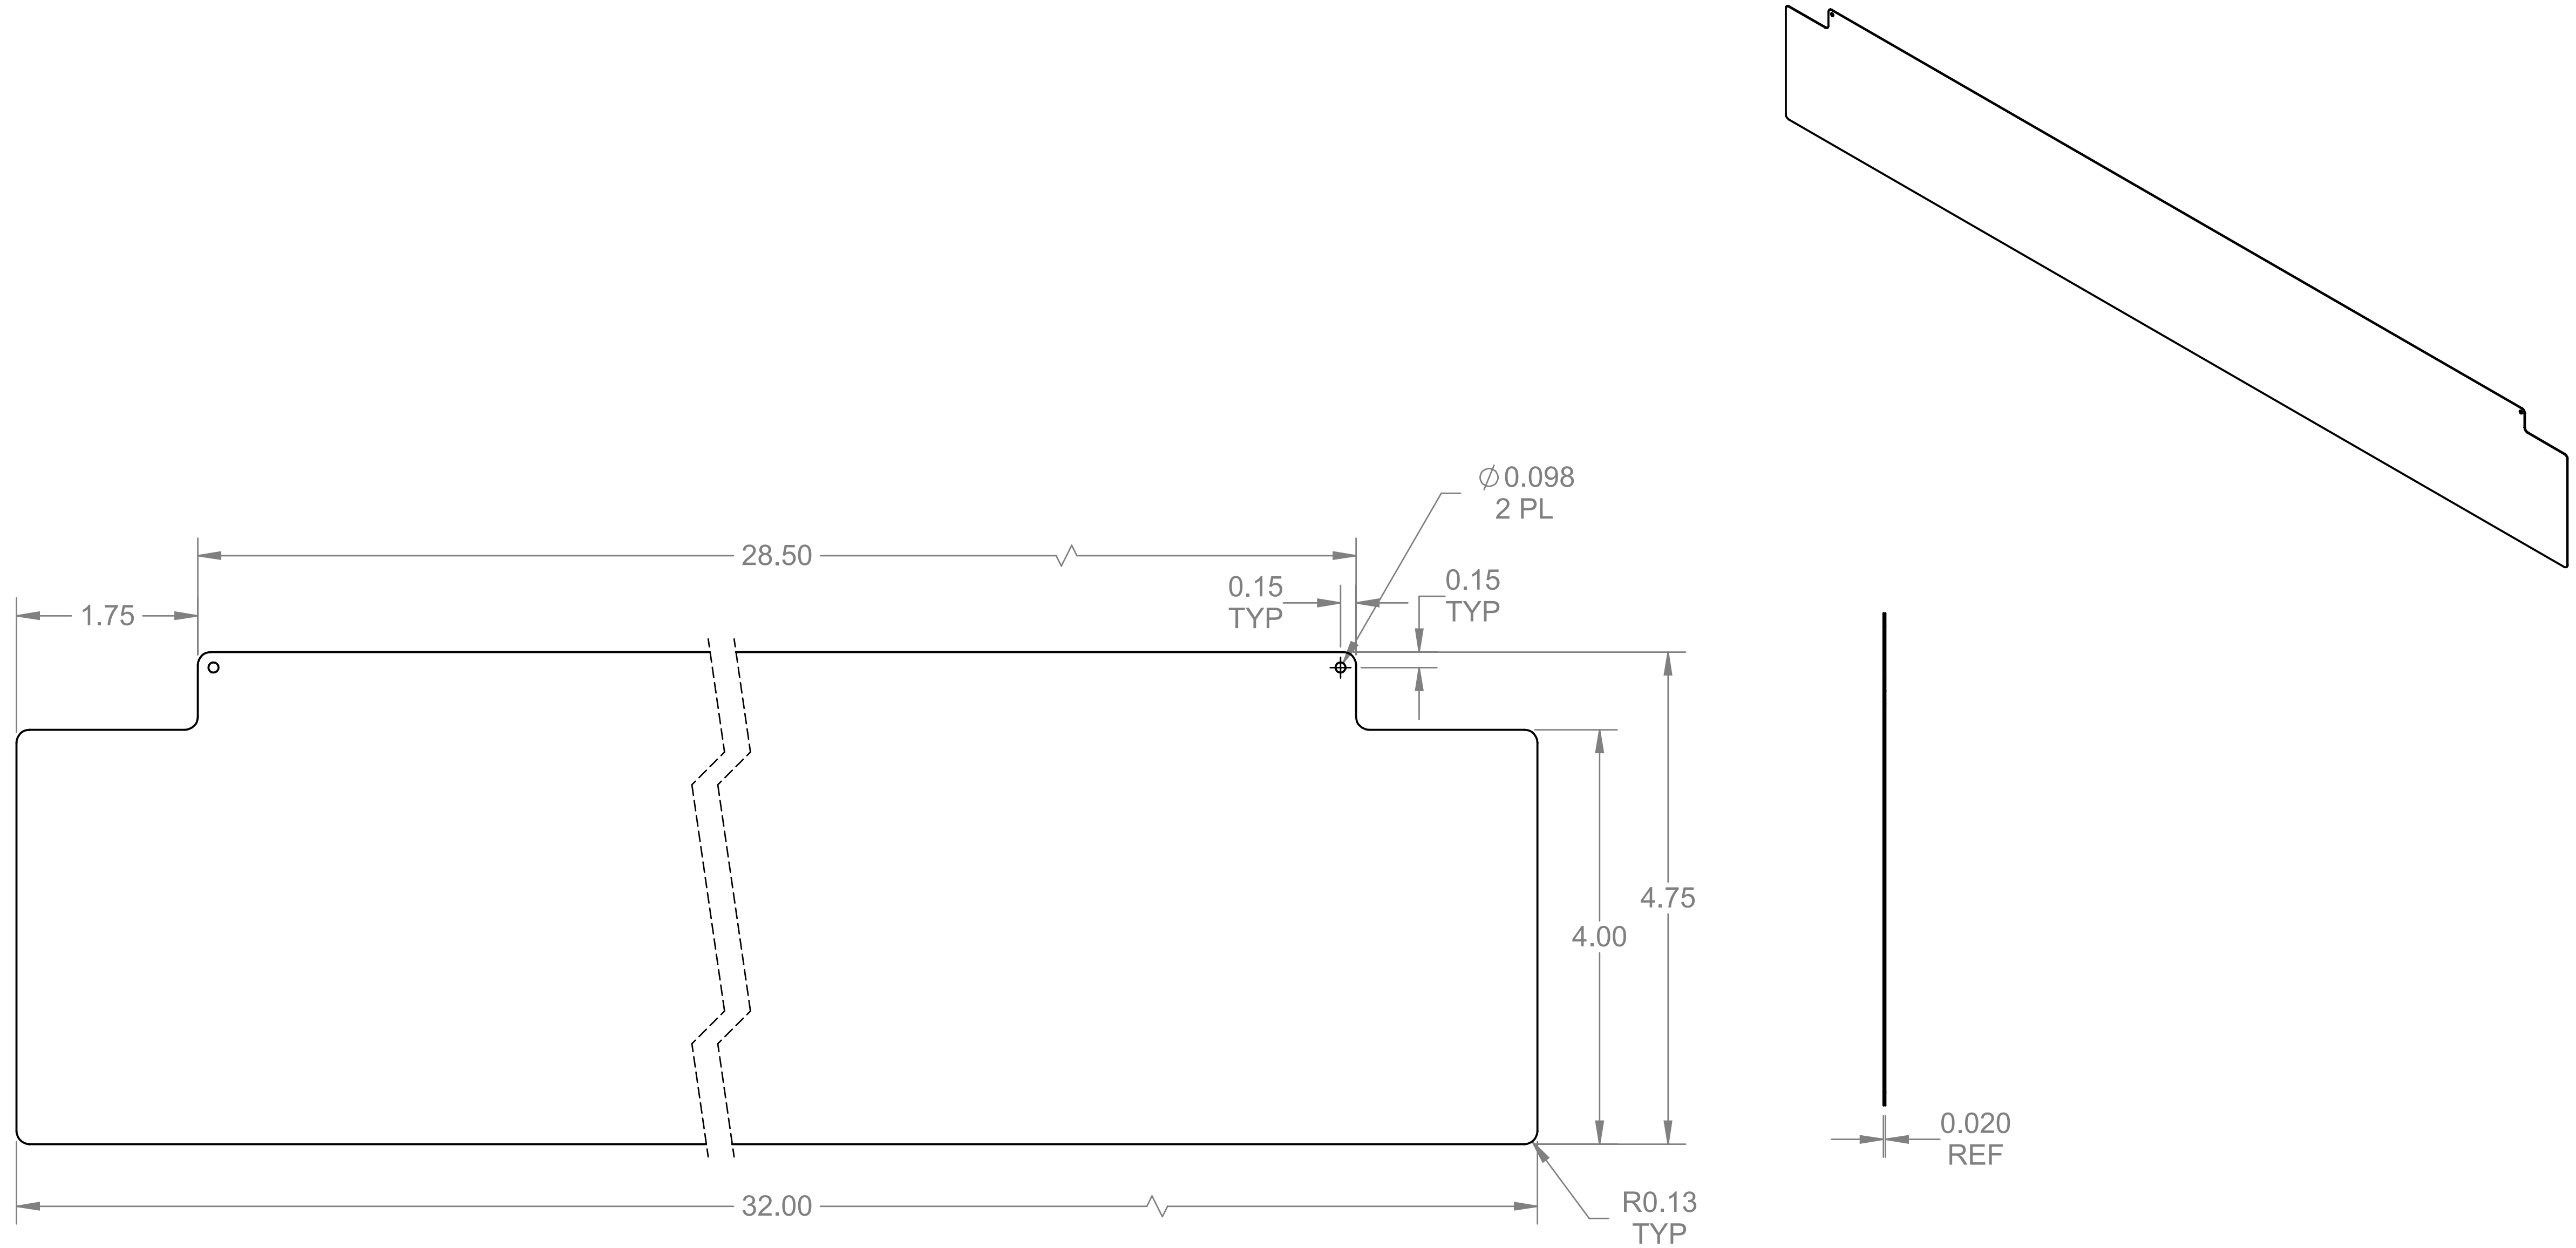

D5358-3 COVER PLATE

NOTES:

1) MATERIAL: 6061-T6/T62 ALUMINUM SHEET 0.020 THICK
PER QQ-A-250/11 OR AMS-QQ-A-250/11
OR AMS 4025 OR AMS 4027 OR ASTM B209
OR 2024-T3 ALUMINUM SHEET, 0.020 THICK
PER QQ-A-250/4 OR AMS-QQ-A-250/4
OR AMS4037 OR ASTM B209
REF DART SPEC M6061TS.020 OR M2024T3S.020
2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
PRIME "GREY EPOXY TEMPO 4500PB-40B PRIMER" PER DART QSI 005 4.2
3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
4) UNITS: INCHES UNLESS OTHERWISE NOTED
5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
6) IDENTIFICATION: IDENTIFY PER DART QSI 044 6.1
7) WEIGHT: 0.29 lbs

PRELIMINARY ISSUE

DESIGN	RF	**DART AEROSPACE LTD** HAWKESBURY, ONTARIO, CANADA
DRAWN	RF	
CHECKED	VS	DRAWING NO. D5358 — REV. B2 — SHEET 2 OF 2
MFG. APPR.	DD	
APPROVED	HS	TITLE COVER PLATE — SCALE NTS
DE APPR.	DS	
DATE	17.02.09	